



Characteristics



- Compact and low profile air only recessed air curtain, with full grille view, specially designed for applications without heating
- Self-supporting casing construction made of galvanized steel plate, ready to be installed recessed in a false ceiling.
- Inlet grille (free of maintenance) made with aluminium profiles and blow-out nozzle, integrated in a single white frame colour RAL 9016. Other colours are available on request.
- Double-inlet centrifugal fans driven by an external rotor motor and low noise level. 5-speed selector. "EC" models with very low consumption efficient fans.
- "A" type without heating, air only.
- Includes Plug&Play control with 7m RJ45 cable and infrared remote control. Optional: Clever control (programmable, automatic, intelligent, energy saving, Modbus RTU for BMS...).
- Air curtain with UL components, but without being certified.

Specifications



AIR ONLY 208 V

Model	Airflow m³/h	Power Fans 208V-60Hz kW	Current Fans 208V-60Hz A	Noise Level (5 m) dB(A)	Weight kg
RC M 1000 A 60Hz	1850	0,221	1,07	54	33
RC M 1500 A 60Hz	2775	0,332	1,61	55	50
RC M 2000 A 60Hz	3700	0,442	2,14	56	61
RC M 2500 A 60Hz	4625	0,553	2,68	57	68
RC G 1000 A 60Hz	2325	0,332	1,61	56	37
RC G 1500 A 60Hz	3100	0,442	2,14	57	55
RC G 2000 A 60Hz	4650	0,664	3,21	58	71
RC G 2500 A 60Hz	5425	0,774	3,75	59	78
RC ECG 1000 A 60Hz	2700	0,319	2,79	60	37
RC ECG 1500 A 60Hz	3600	0,426	3,72	61	56
RC ECG 2000 A 60Hz	5400	0,638	5,58	62	71
RC ECG 2500 A 60Hz	6300	0,745	6,51	63	78

AIR ONLY 240 V

Model	Airflow m³/h	Power Fans 240V-60Hz kW	Current Fans 240V-60Hz A	Noise Level (5 m) dB(A)	Weight kg
RC M 1000 A 60Hz	2000	0,263	1,10	55	33
RC M 1500 A 60Hz	3000	0,395	1,65	56	50
RC M 2000 A 60Hz	4000	0,526	2,20	57	61
RC M 2500 A 60Hz	5000	0,658	2,75	58	68
RC G 1000 A 60Hz	2475	0,395	1,65	57	37
RC G 1500 A 60Hz	3300	0,526	2,20	58	55
RC G 2000 A 60Hz	4950	0,790	3,30	59	71
RC G 2500 A 60Hz	5775	0,921	3,85	60	78
RC ECG 1000 A 60Hz	2850	0,381	2,94	61	37
RC ECG 1500 A 60Hz	3800	0,508	3,92	62	56
RC ECG 2000 A 60Hz	5700	0,762	5,88	63	71
RC ECG 2500 A 60Hz	6650	0,889	6,86	64	78

Dimensions

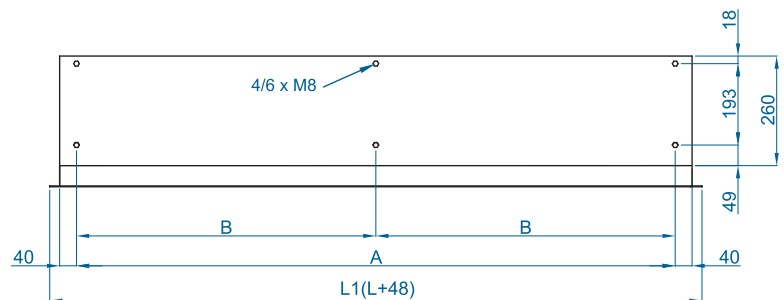

	L	L1	A	B
RC 1000	1000	1048	920	-
RC 1500	1500	1548	1420	710
RC 2000	2000	2048	1920	960
RC 2500	2500	2548	2420	1210

